
GOODRICH SOLUTIONS WALLCOVERING 237 | GARNET





PREMIERWALL 2022 - 2025.12



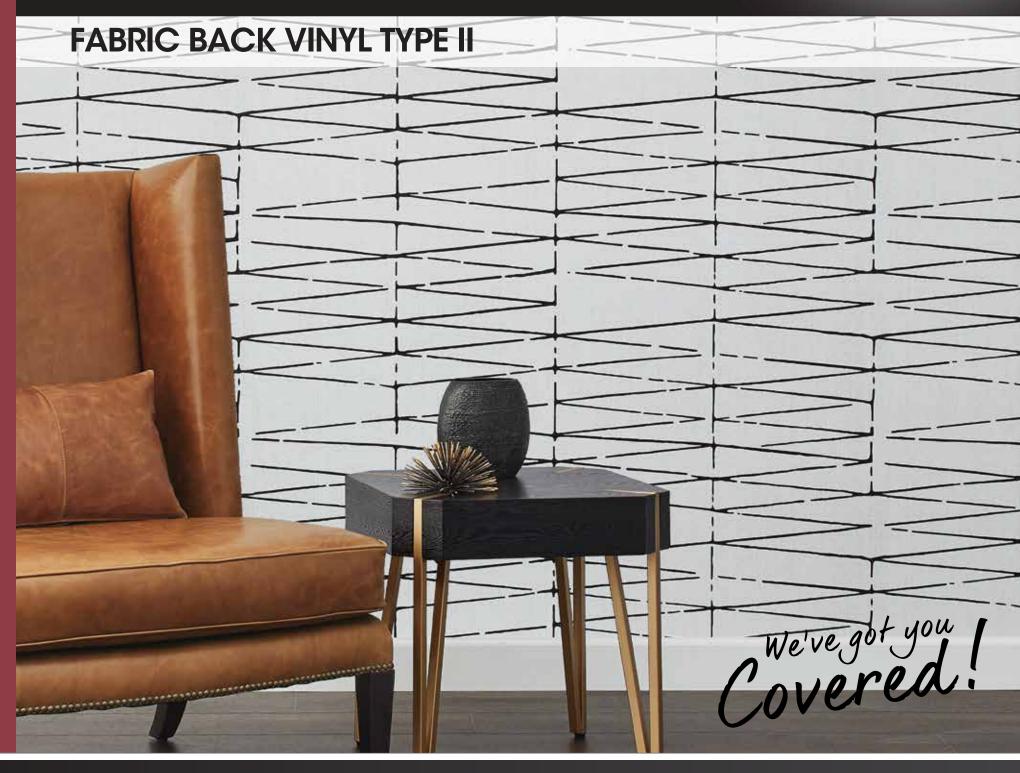

PREMIERWALL GARNET LOW VOC

50 - 54" Fabric-Backed Contract Wallcovering

PHYSICAL PROPERTIES

Weight(avg) 20 oz. PLY / 620G/PLM

Roll Size 50/54" x 30yds

Backina Osnabura / Non Woven

Meets or exceeds Federal Specification CCC-W-408D for Type II Wallcovering

FIRE SAFETY

- Class "A"fire rated tested in accordance with ASTM E-84 Tunnel test
- Flame spread: 25 / Smoke developed: 45
- Passes NFPA 286 Corner Burn Test

ENVIRONMENT AND HEALTH

- The product has been assessed according to the assessment criteria of the Singapore Green Building product certification scheme.

 Meets California section 01350 IAQ test requirements for wallcovering
- Can contribute to LEED EQ 4.1 point for low-emitting materials, adhesives, and sealants, if used with low VOC adhesives
- Can contribute to LEED MR 5.1 point for regional materials

ANTI-MICROBIAL FEATURES

PREMIERWALL GARNET can be perforated, with 30 yard minimum requirement, for enhanced permeability. This product is intended for use in buildings that are properly designed and maintained to avoid moisture infiltration, condensation and/or accumulation at wall cavities and wall surfaces, particularly in warm, humid climates. Goodrich wallcoverings contain anti-microbial additives to resist the growth of mildew and bacteria and pass ASTM G-21. These additives will not prevent mold growth if residual wall moisture is in excess of 4% and/or is allowed to accumulate in or behind the walls.

BATCHING

Since slight variation in shading may occur time to time, it is important that the roll carrying the same batch number be used in any one area.


ORIGIN

USA



SHERWOOD

PWG0108 Aged Cedar

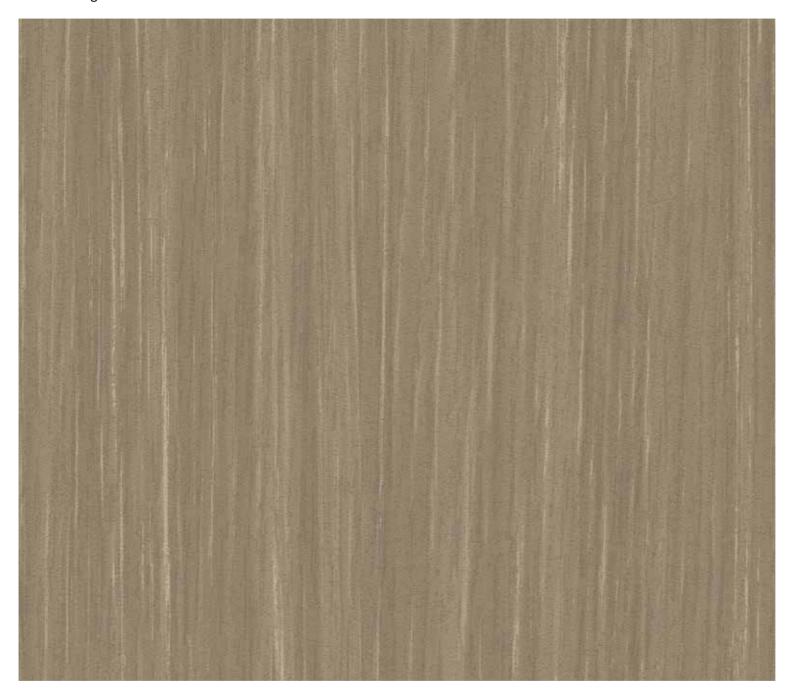

SPECIFICATIONS & PROPERTIES

Weight: 20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM

Width: 54" (137cm)
Backing: Osnaburg
Match: Reverse / Random

Custom colors, weights, widths and microventing are available.

- Low VOC, California section 01350 IAQ
- 10% Recycled content
- Non-Phthalate
- NSF/ANSI 342 certified
- EPD/HPD
- California Prop 65, no labeling required



PWG0107 Antique Chestnut

PWG0108 Aged Cedar






PWG0115 Walnut

PWG0116 Wenge

MAKE IT MYLAR

PWG0208 Grey Lame

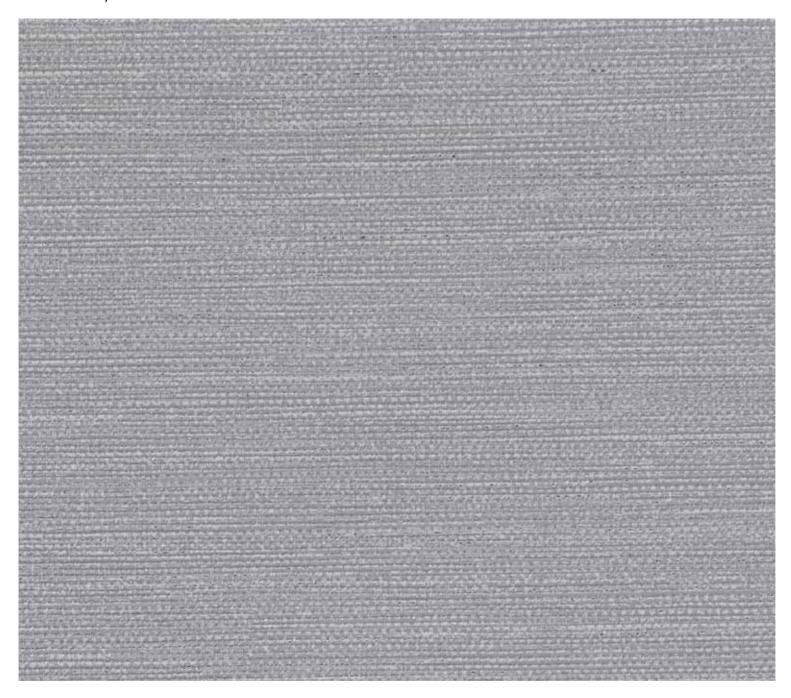

SPECIFICATIONS & PROPERTIES

20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM 50" (127cm) Weight:

Width: Backing: Osnaburg Match: Reverse / Random

Custom colors, weights, widths and microventing are available.

- 10% recycled content (varied blend of pre-consumerand
- remanufactured material)
 Certified to NSF/ANSI 342 Sustainability Assessment
 Meets California Section 01350 IAQ test requirements for wallcovering
- Can contribute to LEED EQ 4.1 for low-emitting materials, adhesives, and sealants, if used the low VOC adhesives
- Can contribute to LEED MR 5.1 for regional materials



PWG0201 Crystalline Cream



PWG0203 Very Snappy




PWG0205 Gilded




PWG0207C Taupe Twinkle



PWG0202 White Ice

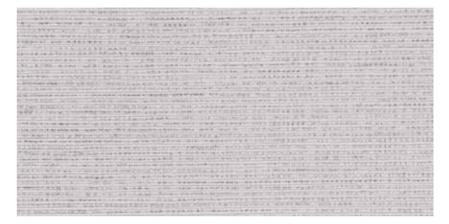

PWG0204 Gold Frost

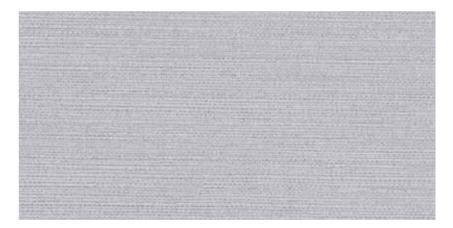

PWG0206 Dime Shine



PWG0208 Grey Lame






PWG0209 Polished Plum




PWG0211 Rockin Rose

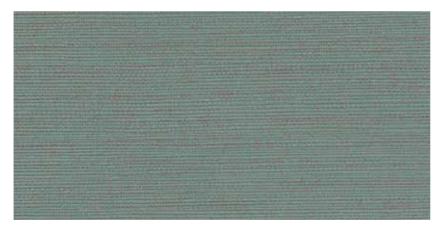

PWG0213 Dazzle Jade



PWG0215 Blue Bling

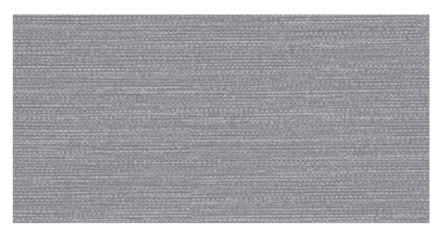

PWG0210 Silver Shimmer



PWG0212 Slick Spats




PWG0214 Navy Sparkler



PWG0216 Top Haute

ON POINTE

PWG0301 Spot Lights

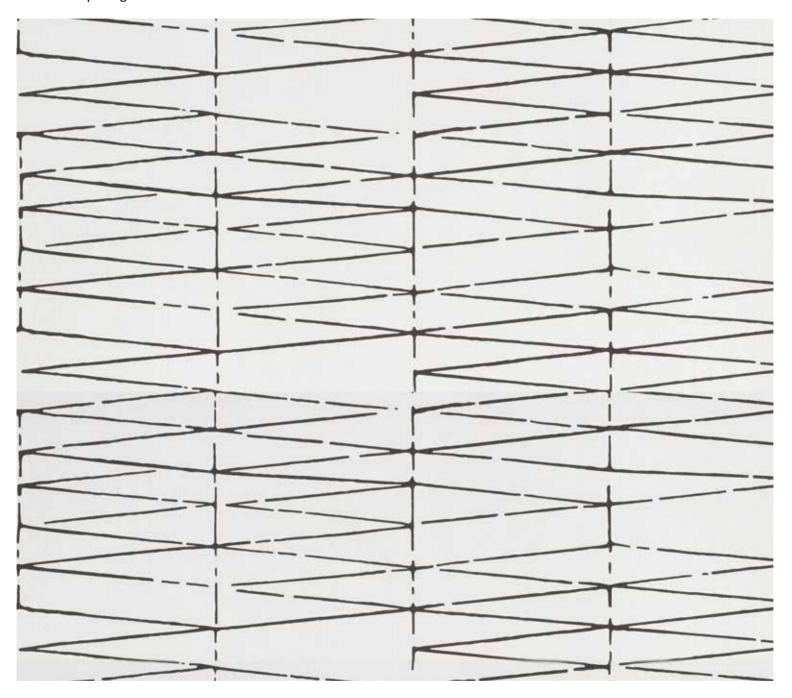

SPECIFICATIONS & PROPERTIES

20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM 52" (132cm)


Weight: Width: Backing: Non-woven Match: Straight
Pattern Repeat: 18" h x 52" w

Custom colors, weights, widths and microventing are available.



ON POINTE PETITE

PWG0406 Classical Charcoal

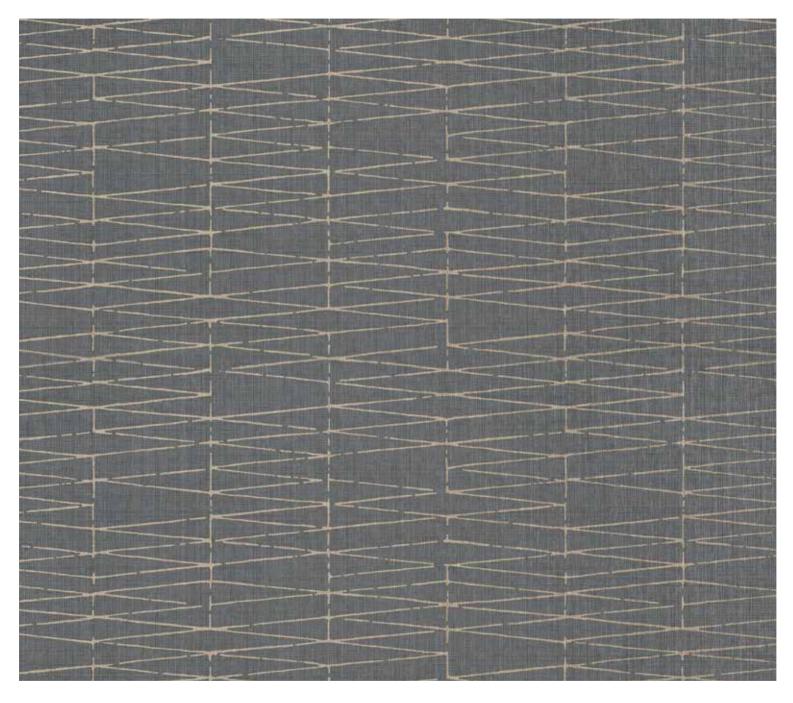

SPECIFICATIONS & PROPERTIES

 Veight:
 20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM


 Vidth:
 52" (132cm)

Weight: 20 oz. PLY/620
Width: 52" (132cm)
Backing: Non-woven
Match: Straight
Pattern Repeat: 18" h x 26" w


Custom colors, weights, widths and microventing are available.



PWG0401 White Lights

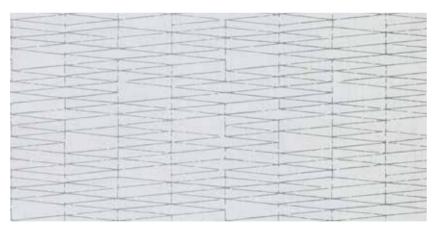

PWG0404 Silver Song

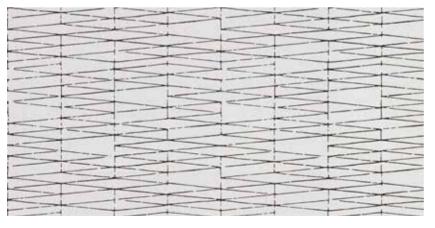

PWG0405 Lights Out



PWG0402 Chiffon Tutu




PWG0403 Dusk Duet



PWG0406 Classical Charcoal




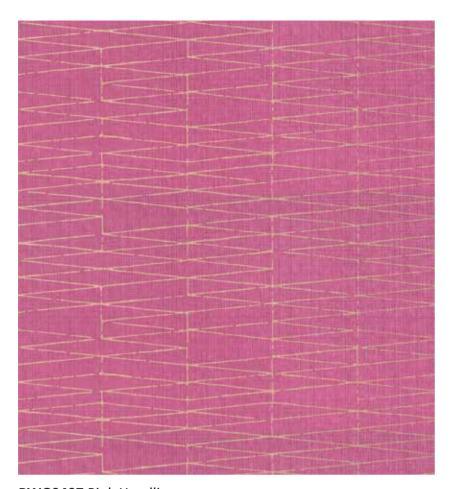

PWG0407 Pink Headliner




PWG0410 Box Office Bronze

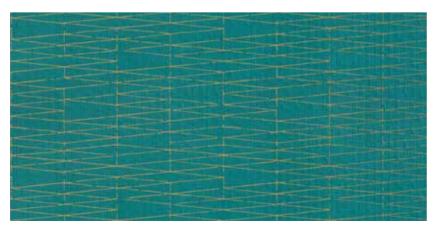

PWG0411 Superstar Teal



PWG0408 On Tour Taupe

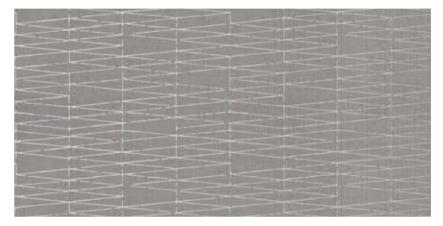

PWG0409 Moondance



PWG0412 Sapphire Solo

SHAPE SHIFT

PWG0506 Mixed Moods



SPECIFICATIONS & PROPERTIES

20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM 52" (132cm) Osnaburg Weight: Width: Backing: Straight random 24" h x 52" w Match: Pattern Repeat:

Custom colors, weights, widths and microventing are available.





PWG0501 lcy Intersection



PWG0502 Neutral Grounds



PWG0503 Shark Skin



PWG0504 Sage Advice




PWG0505 Locus Pink



PWG0506 Mixed Moods

PLASTER PRELUDE

PWG0604 Stone Solo

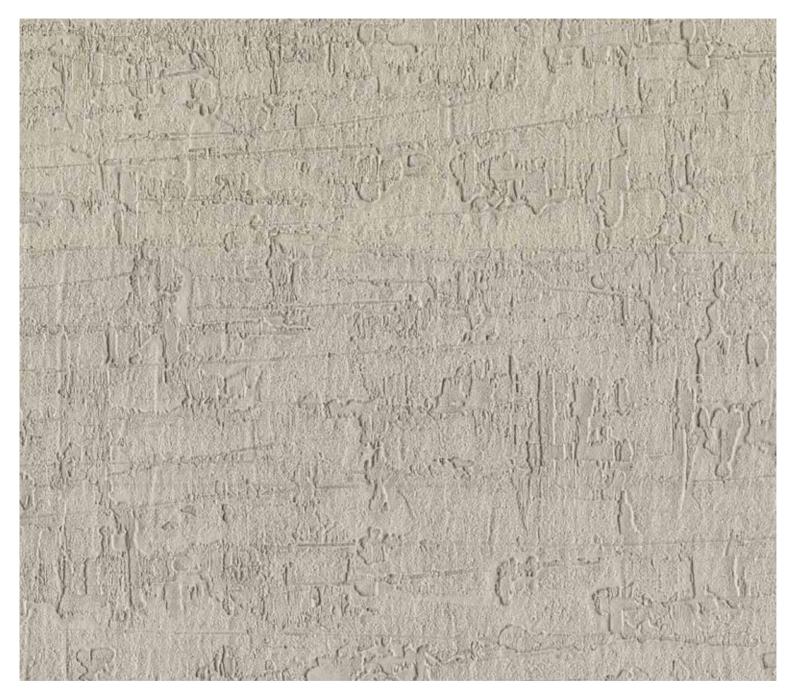

SPECIFICATIONS & PROPERTIES


20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM 52" (137cm)

Weight: Width: Backing: Osnaburg Match: Reverse / Random

Custom colors, weights, widths and microventing are available.


- Low VOC, California section 01350 IAQ 10% Recycled content Non-Phthalate

- NSF/ANSI 342 certified
- EPD/HPD
- California Prop 65, no labeling required

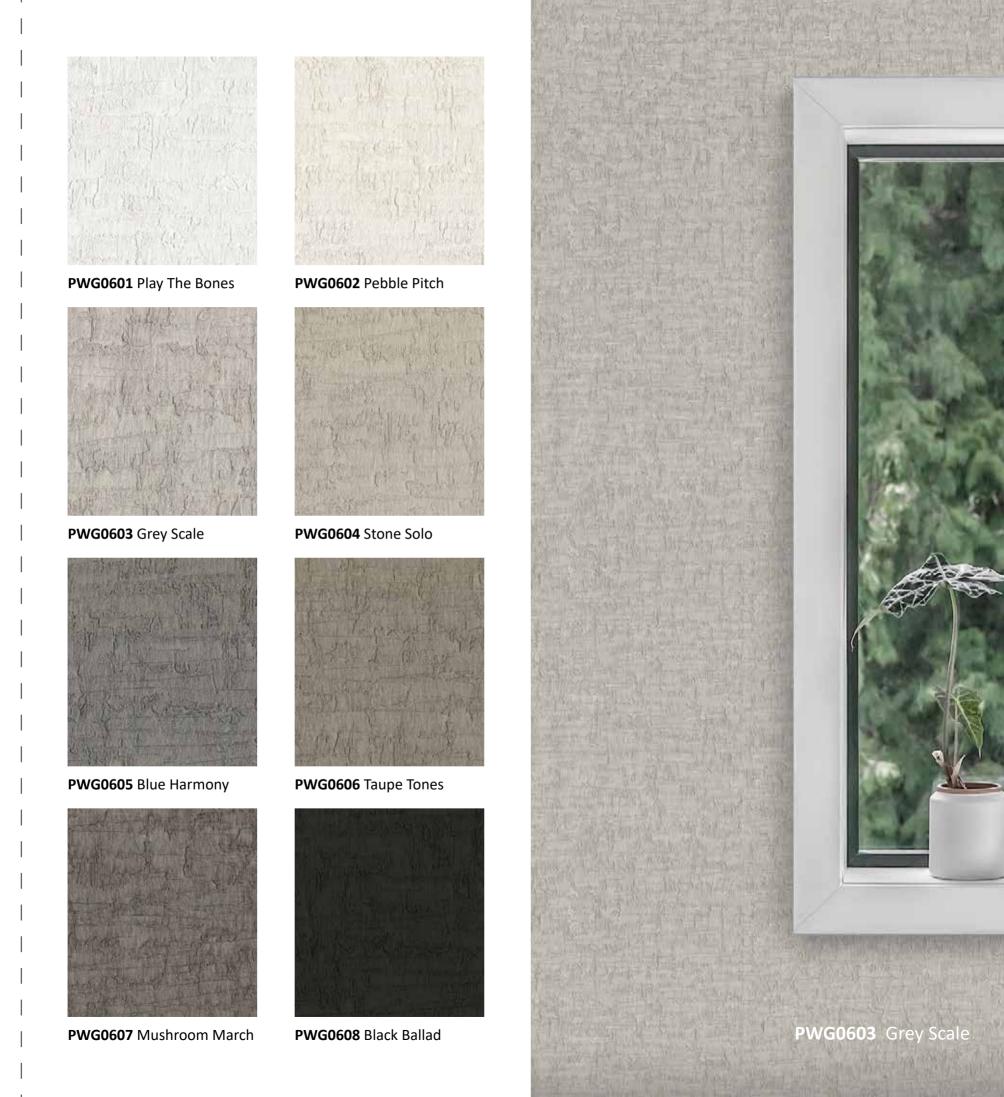

PLASTER PRIMO

PWG0708 Jazzy Pearl

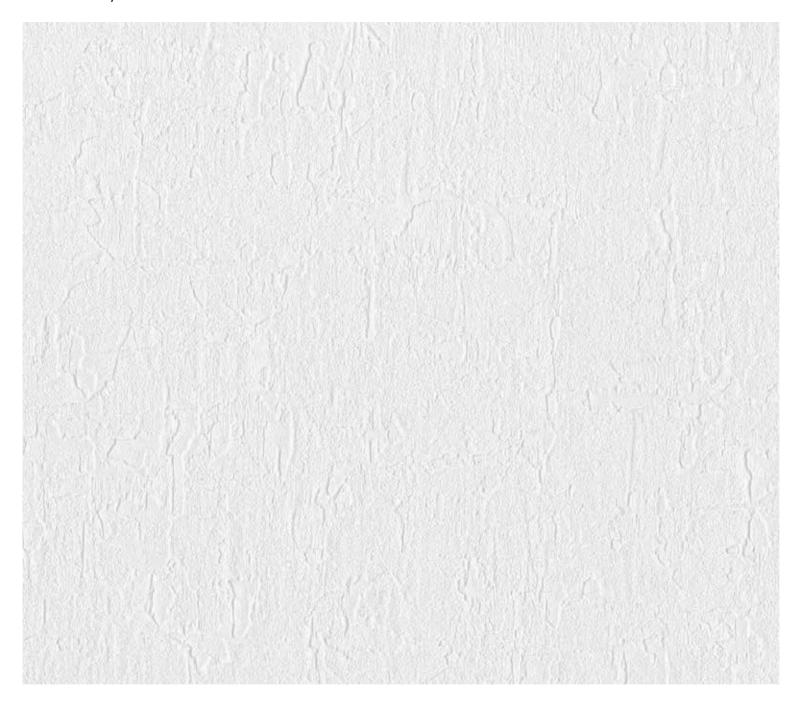

SPECIFICATIONS & PROPERTIES

Weight: 20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM Width: 54" (137cm)

Width: 54" (137cm)
Backing: Osnaburg
Match: Reverse / Random

Custom colors, weights, widths and microventing are available.

- Low VOC, California section 01350 IAQ
- 10% Recycled content
- Non-Phthalate
- NSF/ANSI 342 certified
- EPD/HPD
- California Prop 65, no labeling required



PRIMA SILK

PWG0812 Caramelized



SPECIFICATIONS & PROPERTIES

Weight: 20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM

Width: 54" (137cm)
Backing: Osnaburg
Match: Reverse / Random

Custom colors, weights, widths and microventing are available.


- Low VOC, California section 01350 IAQ
- 10% Recycled content
- Non-Phthalate
- NSF/ANSI 342 certified
- EPD/HPD
- California Prop 65, no labeling required











PWG0816 Copper Tine



PWG0819 Oasis



PWG0821 Evergreen



PWG0822 Bluebird



PWG0814 Moonstruck



PWG0817 Stone Mason



PWG0818 Carbon Dating



PWG0820 Clam Up




PWG0823 Dark Lagoon



PWG0824 Midnight

DASH-ING

PWG0918 Navy

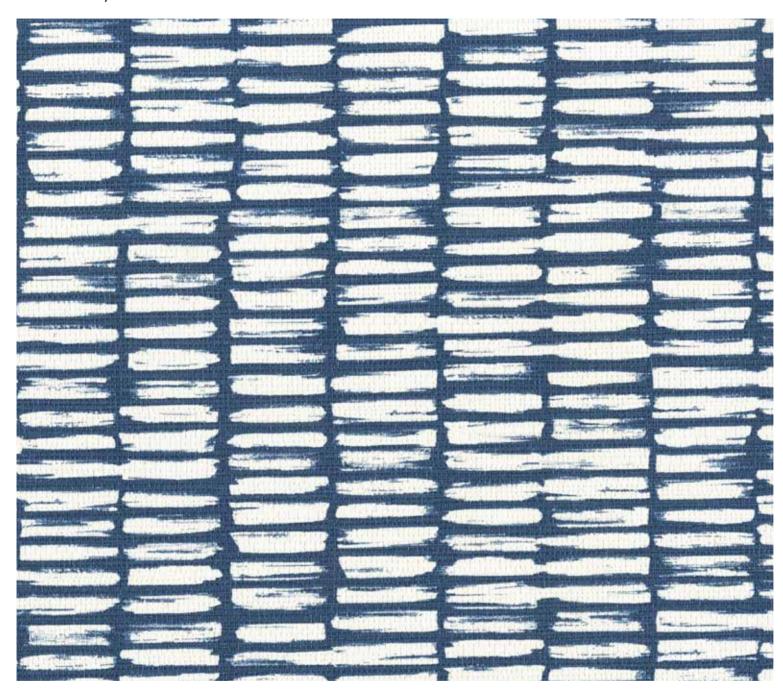

SPECIFICATIONS & PROPERTIES

20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM 52" (132cm)

Weight: Width: Backing: Osnaburg Match: Reverse 18" h x 52" w. Pattern Repeat:

Custom colors, weights, widths and microventing are available.

- Low VOC, California section 01350 IAQ 10% Recycled content Non-Phthalate

- NSF/ANSI 342 certified
- EPD/HPD
- California Prop 65, no labeling required







PWG0909 Taupe



PWG0910 Burnished Gold




PWG0911 Black & White




PWG0912 Slick Black




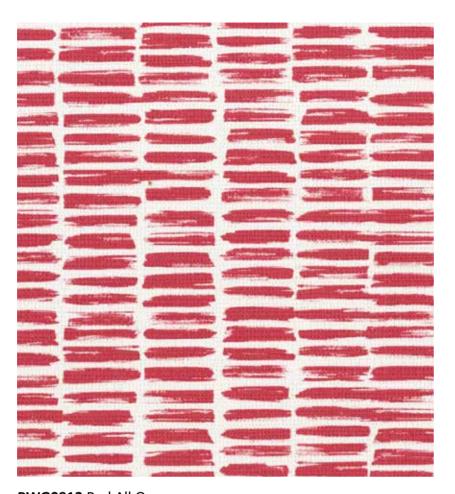


PWG0913 Red All Over

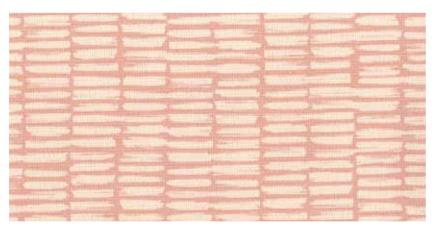


PWG0916 Glow

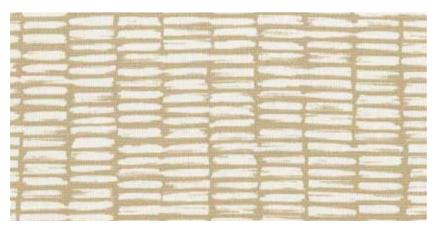


PWG0917 Loot

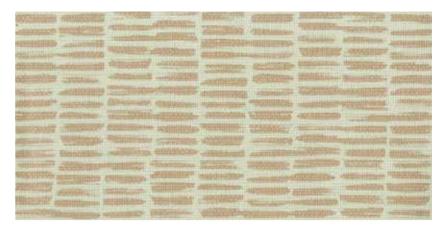

PWG0914 Sage

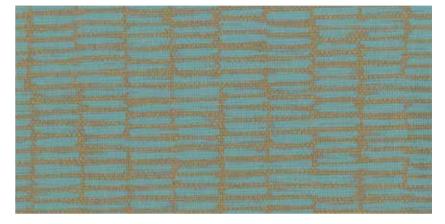

PWG0915 E Green Copper

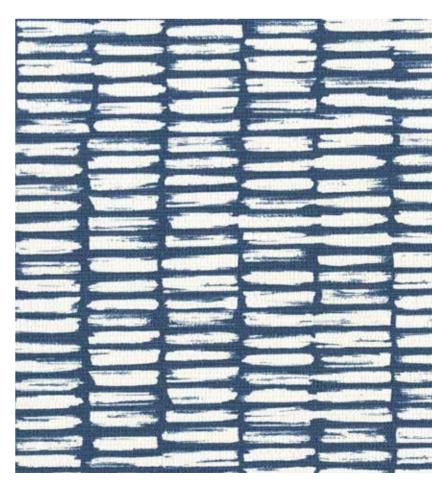

PWG0918 Navy

HIDE & SILK

PWG1012 Sand Dune



SPECIFICATIONS & PROPERTIES

20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM 54" (137cm) Weight:

Width: Backing: Osnaburg

Match: Straight / Random

Custom colors, weights, widths and microventing are available.

- 10% recycled content (varied blend of pre-consumerand remanufactured material)
- Certified to NSF/ANSI 342 Sustainability Assessment
 Meets California Section 01350 IAQ test requirements for wallcovering
- Can contribute to LEED EQ 4.1 for low-emitting materials, adhesives, and sealants, if used the low VOC adhesives
- Can contribute to LEED MR 5.1 for regional materials



PWG1009 Morning Sky **PWG1010** Hint Of Mint

PWG1011 Misty Rose PWG1012 Sand Dune





PWG1015 Desert Blush





PWG1019 Mocha Glint



PWG1021 Pale Pear



PWG1022 Warm Taupe




PWG1014 Deep Sea



PWG1017 Mermaid Green



PWG1018 Bermuda Blue

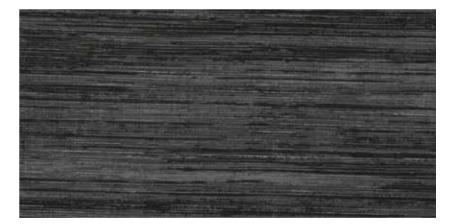

PWG1020 Black Horizon



PWG1023 Charming Charcoal



PWG1024 Wrought Iron

GRATEFUL DENIM

PWG1105 Shiny Overalls



SPECIFICATIONS & PROPERTIES

20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM Weight:

Width: 54" (137cm) Backing: Osnaburg

Match: Reverse / Random


Custom colors, weights, widths and microventing are available.

- 10% recycled content (varied blend of pre-consumer and remanufactured material) Certified to NSF/ANSI 342 Sustainability Assessment
- Meets California Section 01350 IAQ test requirements for wallcovering
- Complies with USGBC LEED v4 Criteria, under Indoor Environmental Quality (CDPH/EHLB/Standard Method Version 1.1, 2010)





PWG1101 Crisp White



PWG1102 Light Fade




PWG1103 Pedal Pushers




PWG1104 Stone Wash



PWG1105 Shiny Overalls

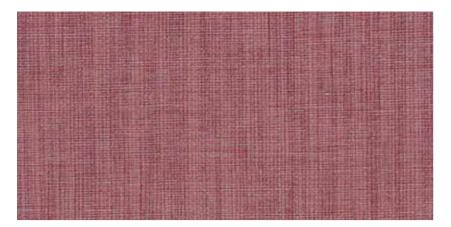

PWG1106 Dusty Rose

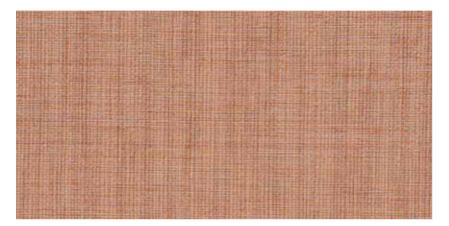

PWG1108 Tricot Corduroys



PWG1110 Bloomers




PWG1112 Capri Blush




PWG1107 Clean Trousers




PWG1109 Soft Khakis

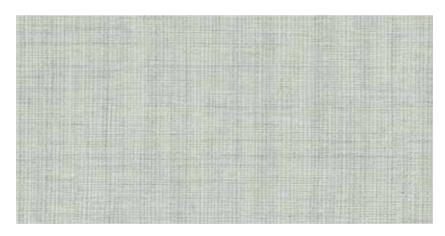

PWG1111 Dungarees

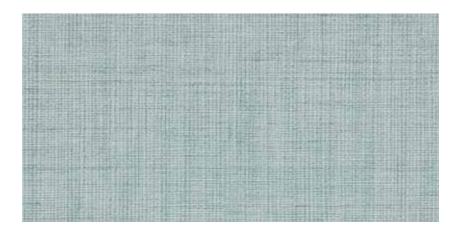

PWG1113 Bermuda Shorts

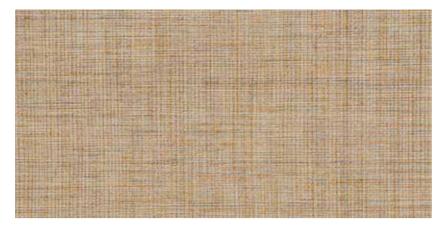

PWG1114 Cognac Wranglers




PWG1116 Vintage Cords



PWG1118 Desert Rock




PWG1120 Bell Bottoms

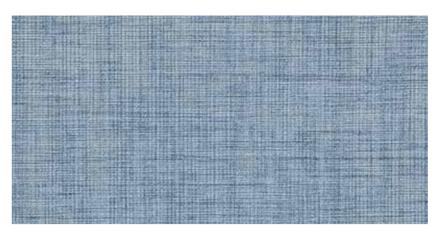


PWG1115 Chambray



PWG1117 Blue Jeans

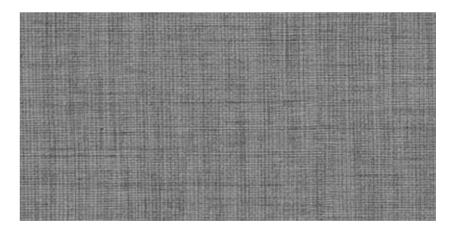

PWG1119 Grey Romper

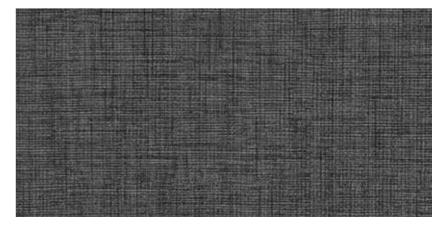

PWG1121 Black Slacks

FRESH PLAID

PWG1205 Cobalt Navy



SPECIFICATIONS & PROPERTIES

 Weight:
 20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM

 Width:
 52" (132cm)

Weight: 20 oz. PLY/620
Width: 52" (132cm)
Backing: Osnaburg
Match: Straight
Pattern Repeat: 24" h x 52" w

Custom colors, weights, widths and microventing are available.





PWG1201 Oatmeal



PWG1202 Glass



PWG1203 Purity



PWG1204 Cool Grey



PWG1205 Cobalt Navy



PWG1206 Blackboard

ON STAGE

PWG1312 Dusk Duet



SPECIFICATIONS & PROPERTIES

20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM 54" (137cm)

Weight: Width: Backing: Osnaburg Match: Straight / Random

Custom colors, weights, widths and microventing are available.



The Meaning of Home PWG1323 Classical Solo GRACE KELLY HOLLYW



PWG1321 Monologue Mink


PWG1322 On Tour Taupe

PWG1323 Classical Charcoal

PWG1324 Velvet Rope

HULA

PWG1412 Matte Taupe

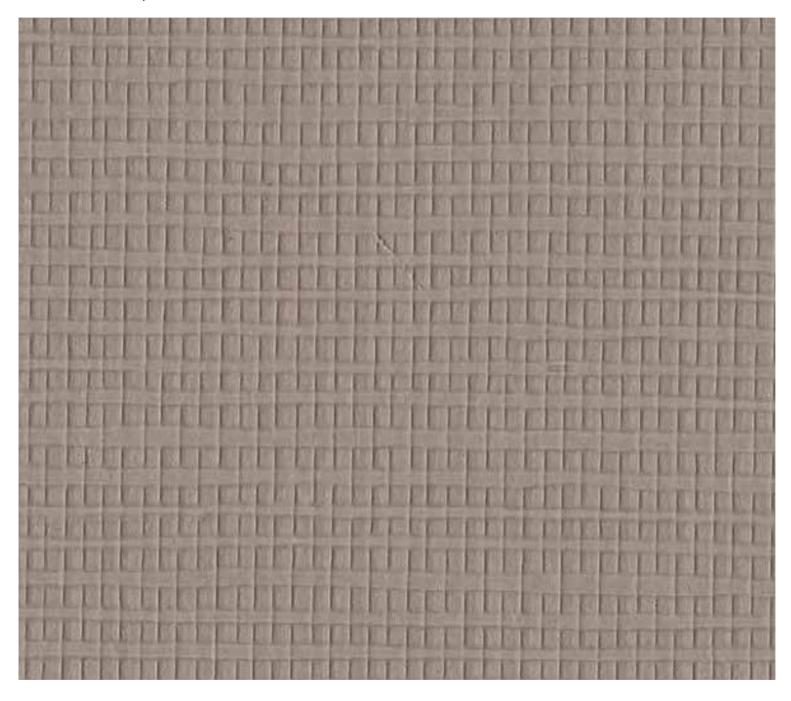

SPECIFICATIONS & PROPERTIES

Weight: 20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM

Width: 54" (137cm) Backing: Non-woven Match: Straight / Random

Custom colors, weights, widths and microventing are available.

- 10% recycled content (varied blend of pre-consumerand remanufactured material)
- Certified to NSF/ANSI 342 Sustainability Assessment
 Meets California Section 01350 IAQ test requirements for wallcovering
- Complies with USGBC LEED v4 Criteria, under Indoor Environmental Quality (CDPH/EHLB/Standard Method Version 1.1, 2010)
- Can contribute to LEED EQ 4.1 for low-emitting materials, adhesives, and sealants, if used with low VOC adhesives
- Can contribute to LEED MR 5.1 for regional materials



PWG1409 Platinum

PWG1410 Matte Beige

PWG1411 Warm Nickel

PWG1412 Matte Taupe





HULA HANA





PWG1425 Matte White



PWG1429 Pale Gold




PWG1426 Platinum




PWG1430 Gold Rush



PWG1427 Pearl



PWG1431 Matte Mint



PWG1428 Matte Black

SPECIFICATIONS & PROPERTIES

Weight:20 oz. PLYWidth:54"Backing:Non-wovenMatch:StraightPattern Repeat:18" h x 54" w

HULA BIG HANA





PWG1432 Matte White



PWG1436 Pale Gold



PWG1433 Pearl



PWG1437 Gold Rush



PWG1434 Matte Black



PWG1438 Blush




PWG1435 Bronzed

SPECIFICATIONS & PROPERTIES

Weight:20 oz. PLYWidth:52"Backing:Non-wovenMatch:StraightPattern Repeat:24" h x 52" w

ROLLIN' STONE

PWG1504 Jumpin Jack Flash

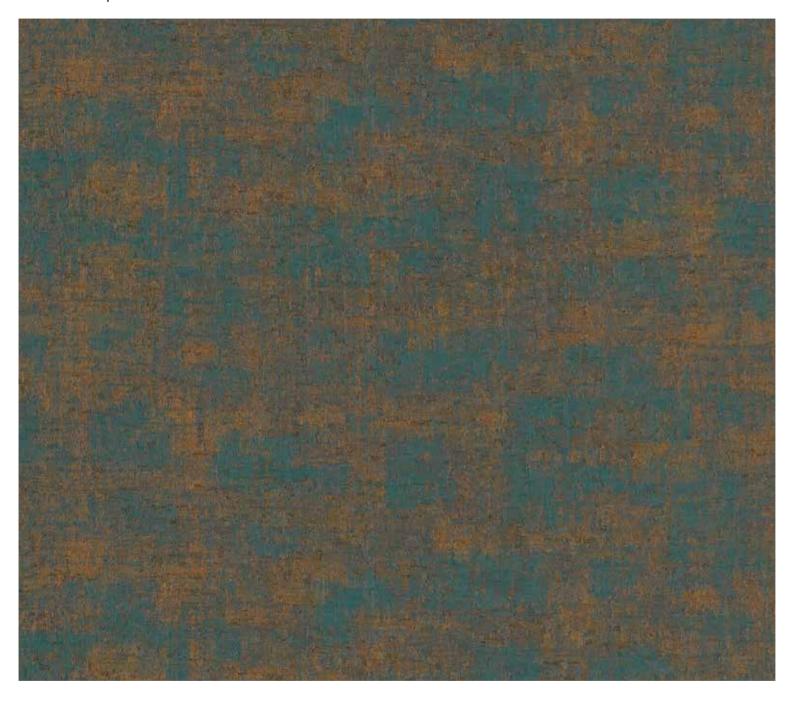

SPECIFICATIONS & PROPERTIES

20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM 54" (137cm) Weight:

Width: Backing: Osnaburg Match: Reverse / Random

Custom colors, weights, widths and microventing are available.

- 10% recycled content (varied blend of pre-consumerand remanufactured material)
- Certified to NSF/ANSI 342 Sustainability Assessment
 Meets California Section 01350 IAQ test requirements for wallcovering
- Complies with USGBC LEED v4 Criteria, under Indoor Environmental Quality (CDPH/EHLB/Standard Method Version 1.1, 2010)







PWG1503 Rocks Off



PWG1505 Get Off My Cloud



PWG1507 Heart Of Stone



PWG1502 Standing In The Shadow



PWG1504 Jumpin Jack Flash



PWG1506 Midnight Rambler



PWG1508 Paint It Black

FRESH MESH

PWG1612 Cool Grey



SPECIFICATIONS & PROPERTIES

Weight: 20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM

Width: 54" (137cm)
Backing: Osnaburg
Match: Reverse / Random

Custom colors, weights, widths and microventing are available.



PWG1611 Silver

PWG1610 Neutral Ground

PWG1609 Oatmeal


PWG1612 Cool Grey





ARROW SMITH

PWG1713 Mahogany Guitar

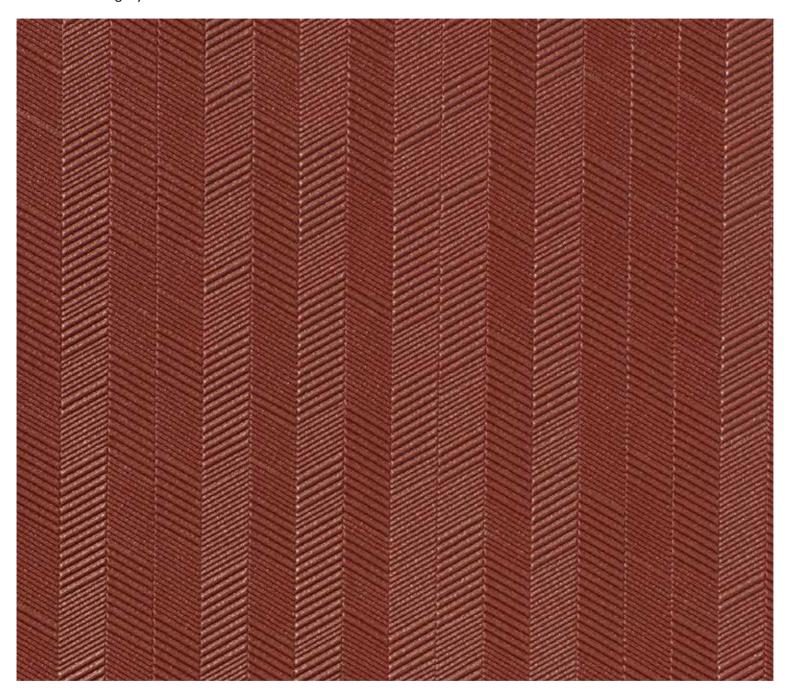

SPECIFICATIONS & PROPERTIES

20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM 54" (137cm) Weight:

Width: Backing: Osnaburg


Match: Reverse / Random

Custom colors, weights, widths and microventing are available.


- 10% recycled content (varied blend of pre-consumer and remanufactured material) Certified to NSF/ANSI 342 Sustainability Assessment
- Meets California Section 01350 IAQ test requirements for wallcovering
- Complies with USGBC LEED v4 Criteria, under Indoor Environmental Quality (CDPH/EHLB/Standard Method Version 1.1, 2010)





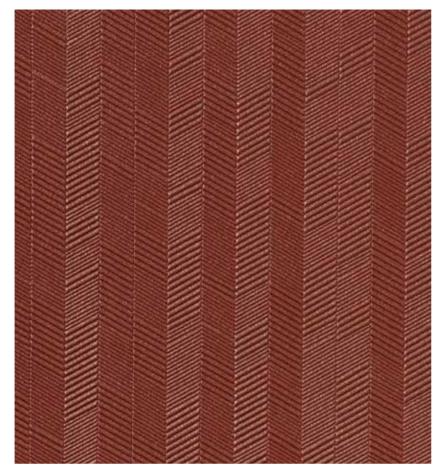

PWG1713 Mahogany Guitar

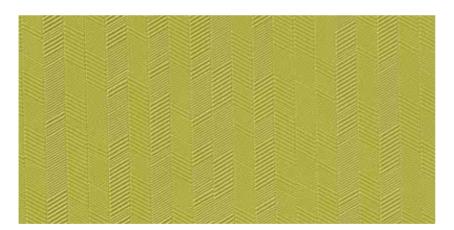


PWG1716 Adams Apple




PWG1717 Tyler Teal



PWG1714 Showy Peach

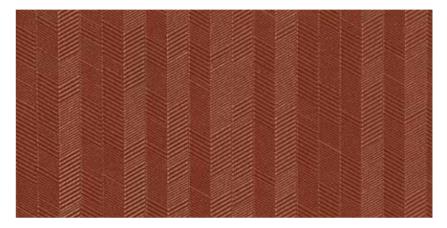

PWG1715 Rust Royalty

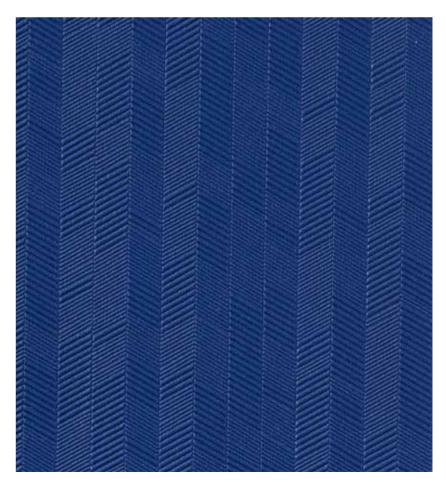

PWG1718 Cobalt Crest

WOODN'T IT BE NICE

PWG1802 Poplar



SPECIFICATIONS & PROPERTIES

Weight: 20 oz. PLY/620 G/PLM 13.3 oz. PSY/451 G/PSM

Width: 54" (137cm)
Backing: Osnaburg
Match: Reverse / Random

Custom colors, weights, widths and microventing are available.

- 10% recycled content (varied blend of pre-consumerand remanufactured material)
- Certified to NSF/ANSI 342 Sustainability Assessment
- Meets California Section 01350 IAQ test requirements for wallcovering
- Can contribute to LEED EQ 4.1 for low-emitting materials, adhesives, and sealants, if used the low VOC adhesives
- Can contribute to LEED MR 5.1 for regional materials



PWG1807 Spruce

PWG1808 Yakisugi Black





PWG1809 Elm



PWG1811 Maple



PWG1813 Butternut



PWG1815 Teak



PWG1810 Hickory



PWG1812 Cherry



PWG1814 Walnut



PWG1816 Mahogany

PREMIERWALL (INDEX) GARNET

Page	Pattern No	Pattern Name	Weight (oz)	Pattern Repeat (In)		Pattern Match	Racking	Roll Size
				Horizontal	Vertical	Pallern Maich	Backing	KOII SIZE
1 - 4	PWG0101 - PWG0116	Sherwood	20	0	0	Reverse Random	Osnaburg	54" x 30yds
5 - 8	PW G0201 - PW G0216	Make It Mylar	20	0	0	Reverse Random	Osnaburg	50" x 30yds
9 - 10	PW G0301	On Pointe	20	52	18	Straight Match	Non-Woven	52" x 30yds
11 - 14	PW G0401 - PW G0412	On Pointe Petite	20	26	18	Straight Match	Non-Woven	52" x 30yds
15 - 16	PW G0501 - PW G0506	Shape Shift	20	52	24	Straight Random	Osnaburg	52" x 30yds
17 - 18	PW G0601 - PW G0608	Plaster Prelude	20	52	0	Reverse Random	Osnaburg	52" x 30yds
19 - 20	PW G0701 - PW G0708	Plaster Primo	20	54	0	Reverse Random	Osnaburg	54" x 30yds
21 - 24	PW G0801 - PW G0824	Prima Silk	20	0	0	Reverse Random	Osnaburg	54" x 30yds
25 - 28	PW G0901 - PW G0918	Dash-ing	20	52	18	Reverse Random	Osnaburg	52" x 30yds
29 - 32	PWG1001 - PWG1024	Hide & Silk	20	0	0	Straight Random	Osnaburg	54" x 30yds
33 - 36	PWG1101 - PWG1121	Grateful Denim	20	0	0	Reverse Random	Osnaburg	54" x 30yds
37 - 38	PW G1201 - PW G1206	Fresh Plaid	20	52	24	Straight Match	Osnaburg	52" x 30yds
39 - 42	PWG1301 - PWG1324	On Stage	20	0	0	Straight Random	Osnaburg	54" x 30yds
43 - 46	PWG1401 - PWG1424	Hula	20	54	0	Straight Random	Non-Woven	54" x 30yds
47	PW G1425 - PW G1431	Hula Hana	20	54	18	Straight Match	Non-Woven	54" x 30yds
48	PW G1 432 - PW G1 438	Hula Big Hana	20	52	24	Straight Match	Non-Woven	52" x 30yds
49 - 50	PWG1501 - PWG1508	Rollin Stone	20	0	0	Reverse Random	Osnaburg	54" x 30yds
51 - 54	PWG1601 - PWG1624	Fresh Mesh	20	0	0	Reverse Random	Osnaburg	54" x 30yds
55 - 58	PWG1701 - PWG1718	Arrow Smith	20	0	0	Reverse Random	Osnaburg	54" x 30yds
59 - 62	PWG1801 - PWG1816	Woodn't It Be Nice	20	0	0	Reverse Random	Osnaburg	54" x 30yds

Installation and Maintenance Guidelines

BEFORE YOU BEGIN

Examine the material carefully to ensure that the pattern, colour, and quality are satisfactory and as ordered. Check that the quantity and dimensions match the required specifications, prior to cutting. In the event that any discrepancies are found, STOP and contact Goodrich Global before proceeding.

We recommend that the wall moisture content does not exceed 4% using a reputable moisture meter, and that active moisture infiltration, condensation, and/or accumulation - particularly in warm, humid climates - is not present. If walls show mould, mildew or visible moisture damage, or if moisture content exceeds recommendations, do not proceed with installation until the condition has been fully corrected under the direction of a qualified professional. Goodrich Global will not be responsible for any performance or quality issues if moisture problems are not addressed before or following installation.

HANGING GUIDELINES

Wallcovering rolls are numbered consecutively and should be cut and installed in reverse sequence, starting with the highest numbered roll. All strips should be hung in sequence as they are cut from the roll, using full widths of material, whenever possible. Install the wallcovering under permanent lighting conditions to evaluate colour and texture uniformity.

When hanging non-reversible or matching patterns, measure the wall height, allowing for pattern match, add 4", and table trim using a straight edge to ensure alignment across seams. Large, dominant pattern repeats require more careful planning as far as starting point, ceiling line, chair rails, door/window headers, etc. Patterns are meant to match at eye level and may run off slightly at the top and bottom of the wall. When hanging textured or random-match patterns, reverse hang alternate strips for a more uniform appearance; overlap and double cut, being careful not to score the wall. If the pattern effect is not acceptable after three strips are hung, re-hang strip #2 without reversing.

If any defect, colour variation, or unacceptable pattern effect is noticeable after three panels are cut and hung, STOP and contact Goodrich Global immediately. Goodrich Global cannot accept any claims on labour or material after more than three lengths have been installed.

ADHESIVE APPLICATION

Apply a uniform coat of a premixed vinyl wallcovering adhesive to the back of the material using a short-napped paint roller or stiff bristle brush (a pasting machine can be used at the installer's discretion). Goodrich WA202 adhesive is recommended for heavyweight vinyl wallcovering. Fold each sheet over and allow up to 10 minutes booking time for the adhesive to penetrate the backing of the lightweight vinyl material (up to 15 minutes for heavyweight vinyl), and to avoid paste drying at the edges.

WA202

Wallcovering

Adhesive

Goodrich WA202 Wallcovering Adhesive:

- Specially formulated for all types of contract wallcoverings
- Non Hazardous, Non Toxic, Non Flammable, Non-Staining
- Solvent Free and Formaldehyde Free
- VOC is 0.45mg/kg
- Made in England



VERY GOOD

Complies to:

- Regulation (EC No 1907/2006)
- CLP European Regulation (EC)

No 1272/2008

⊌ BS3046/1981

INSTALLATION

Hang the first strip to a plumb line, overlapping the ceiling and baseboard, within 12 minutes of paste application. Use a stiff bristle brush to ensure that the wallcovering makes contact with the wall. A plastic smoother can also be used on non-metallic Vinyls, providing only light pressure is applied (do not use sharp-edged tools). Smooth from the middle to the outside edges, being careful not to stretch the material, and work out all air bubbles. Trim at the ceiling and baseboard with a sharp razor blade. For matched patterns, butt the second strip to the edge of the first and smooth out firmly. When double cutting non-matching patterns, place a 2-3" wide strip behind the seam to avoid scoring the wall. Flatten seams exerting light pressure with a seam roller. Lowadhesive painter's tape can be used to keep the face of the seams clean. Before applying the next strip, trim the top and bottom as with the first panel, and proceed in the same manner around the room.

Avoid cutting narrow widths of material for placement above doors and below windows. Vertical joints should not occur less than six inches from inside or outside corners. When trimming at chair rails and ceilings, always use a broad knife rather than a straight edge. Take extra care in keeping the adhesive off the face of the wallcovering.

Remove excess adhesive immediately with a natural sponge, frequently rinsed in clear, warm water, and dry with a soft, lint free cloth. After installation, the walls and wallcovering should be monitored for potential moisture or vapour infiltration, which must be promptly eliminated.

MAINTENANCE

Most wallcovering is easily cleaned using clear, warm water and mild soap with a natural sponge. A soft cloth or towel should only be used to tamp dry (do not rub). Stubborn stains can be removed with a laundry spot remover or rubbing alcohol. Do not use solvent-based cleaning agents, lacquer thinners, nail polish remover, pine oil, or cleaning agents containing bleach, which may cause discoloration over time.

Note: The above is intended only as a guideline. Wallcovering installations must conform to current hanging instructions included with each shipment. The installer has final responsibility for proper installation and evaluation of jobsite conditions.

GOODRICH SOLUTIONS WALLCOVERING 237 | GARNET

WITH GOODRICH,

Your habitat becomes

A gallery of Your self-expressions;

A canvas for Your **creativity**;

A space for Your **SOUI**;

A showcase of Your taste for life;

Stay Connected - www.goodrichglobal.com | info@goodrichglobal.com

f /Goodrich.Global.Singapore / /goodrich_global in /GoodrichGlobal / /GoodrichChina

(Goodrich_Global